

# **ENVIRONMENTAL PRODUCT DECLARATION**

in accordance with ISO 14025, ISO 21930 and EN 15804

Owner of the declaration:	Leca International
Program operator:	The Norwegian EPD Foundation
Publisher:	The Norwegian EPD Foundation
Declaration number:	NEPD-2800-1496-EN
Registration number:	NEPD-2800-1496-EN
ECO Platform reference number:	-
Issue date:	19.04.2021
Valid to:	19.04.2026

# Leca® Basicblokk 15 cm

## Leca International





Leca



## **General information**

### Product:

Leca ® Basicblokk 15 cm

#### **Program operator:**

The Norwegian EPD Foundation Pb. 5250 Majorstuen, 0303 Oslo Phone: +47 23 08 80 00 e-mail: post@epd-norge.no

## **Declaration number:**

NEPD-2800-1496-EN

#### ECO Platform reference number:

#### This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A1:2013 serves as core PCR NPCR Part A: Construction products and services. Ver. 1.0. April 2017

#### Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

#### **Declared unit:**

1 m3 Leca ® Basicblokk 15 cm

Declared unit with option:

A1,A2,A3,A4

## Functional unit:

Declared unit (DU) is 1 m3 with blocks.

## General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Individual third party verification of each EPD is not required when the EPD tool is i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPDNorway, and iii) the proccess is reviewed annualy. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools.

#### Verification of EPD tool:

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools.

Anne Rønning, Norsus AS

(no signature required)

#### Owner of the declaration:

Leca International Contact person: Tone Storbråten Phone: +47 41 43 71 00 e-mail: info@leca.no

## Manufacturer:

Leca International Årnesvegen 1 2009 Nordby Norway

### Place of production:

Leca Borge Moumgaten 3 1658 Torp Norway Norway

### Management system:

ISO 14001 ISO 9001

#### Organisation no:

918 799 141

#### Issue date:

19.04.2021

### Valid to:

19.04.2026

## Year of study:

2017

### **Comparability:**

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

#### Development and verification of EPD:

The declaration has been developed and verified using EPD tool lca.tools ver EPD2020.11, developed by LCA.no AS. The EPD tool is integrated into the company's environmental management system, and has been approved by EPD-Norway

Developer of EPD:

Geir Norden

Reviewer of company-specific input data and EPD:

Tone Storbråten

## Approved:

Sign

Håkon Hauan, CEO EPD-Norge



## Product

### **Product description:**

Leca® Basicblokk 15 cm is produced of Leca lightweight aggregate, cement and water. Leca® Basicblokk is a fast and efficient solution for loadbearing and non-bearing walls.

## **Product specification**

The composition of the product is described in the following table:

Materials	%
Leca® LWA, volume by volume	100-120%
Binder, weight by weight	10 - 20 %
Wooden pallet	1,1 unit per DU
Wrap film	0,5 kg per DU

### Technical data:

Leca® Basicblokk 15 cm Block: 149mm x 247mm x 499mm

Compressive strength: Block: 3,0 N/mm<sup>2</sup>

Block density: 569 kg//m<sup>3</sup> Block concrete density: 630 kg//m<sup>3</sup>

#### Market:

Norway

Reference service life, product

> 50 years

Reference service life, building

## LCA: Calculation rules

## Declared unit:

1 m3 Leca® Basicblokk 15 cm

#### Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

### Allocation:

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste production in-house is allocated equally among all products through mass allocation. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

### Data quality:


Specific data for the product composition are provided by the manufacturer. They represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on registered EPDs according to EN 15804, Ostfold Research databases, ecoinvent and other LCA databases. The data quality of the raw materials in A1 is presented in the table below.

Materials	Source	Data quality	Year
Chemicals	Chemicals below cut-off	No data	0
Aggregate	Østfoldforskning	Database	2016
Packaging	ecoinvent 3.4	Database	2017
Water	ecoinvent 3.4	Database	2017
Packaging	Modified ecoinvent 3.4	Database	2017
Cement	NEPD-2276-1028-NO	EPD	2020
Leca® 0-1,6 - Borge	Owner of EPD	Database	2017
Leca® 2-4, Borge	Owner of EPD	Database	2017
Leca® 4-10, Borge	Owner of EPD	Database	2017



## System boundary:

All processes from raw material extraction to product from the factory gate are included in the analysis (A1-A3). In addition, transportation to a central storage.

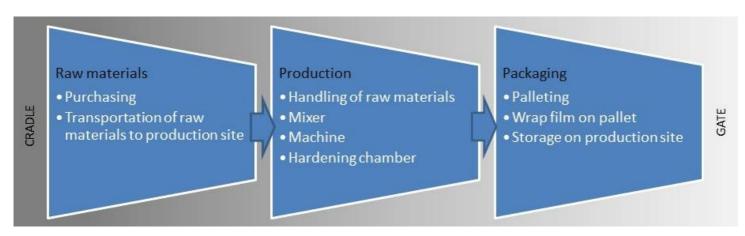

Additional technical information:



## LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

## Transport from production place to user (A4)

Туре	Capacity utilisation (incl. return) % Type of vehicle		Distance km	Fuel/Energy consumption	Unit	Value (l/t)
Truck	55,0 %	Truck, lorry over 32 tonnes, EURO 5	50	0,022823	l/tkm	1,14
Railway					l/tkm	
Boat					l/tkm	
Other Transportation					l/tkm	

## Assembly (A5)

Assembly (A5)			Use (B1)		
- C	Unit	Value		Unit	Value
Auxiliary	kg				
Water consumption	m <sup>3</sup>				
Electricity consumption	kWh				
Other energy carriers	MJ				
Material loss	kg				
Output materials fr ste treatment	kg				
Dust in the air	kg				
VOC emissions	kg		7		

## Maintenance (B2)/Repair (B3)

Maintenance (B2)/Repair (B3)			Replacement (B4)/Refurbishment (B5)		
	Unit	Value	•	Unit	Valu
Maintenance cycle*	NCO		Replacement cycle*		
Auxiliary	Char.		Electricity consumption	kWh	
Other resources	4ric		Replacement of worn parts		
Water consumption	m <sup>3</sup>	A6 0	* Described above if relevant	5.G	
Electricity consumption	kWh				
Other energy carriers	MJ		47.		
Material loss	kg		· Ad		
VOC emissions	kg		" are		
Operational energy (B6) and water const	umption (B7)		Replacement cycle*  Replacement cycle*  Electricity consumption  Replacement of worn parts  * Described above if relevant  A1.A4, are not included  End of Life (C1, c not included  A2.C2, and construction was a sized con		
•	Unit	Value	· · · · · · · · · · · · · · · · · · ·	Unit	Valu
Water consumption	m <sup>3</sup>		Hazardous waste disposed	kg	
Electricity consumption	kWh		Collected as mixed construction was	kg	
Other energy carriers	MJ		Reuse	kg	

kW

Recycling	
Energy recovery	
To landfill	_

## Transport to waste processing (C2)

Power output of equipment

Туре	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Unit	Value (I/t)
Truck					l/tkm	
Railway					l/tkm	
Boat					l/tkm	
Other Transportation					l/tkm	

ka



## LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

## System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Product stage			Construction installation stage		User stage						End of	life stage	•	Beyond the . system bondaries		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De- construction demolition	Transport	W aste processing	Disposal	Reuse-Recovery- Recycling- potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	. D
Х	Х	Х	Х													

## **Environmental impact**

·					
Parameter	Unit	A1	A2	A3	A4
GWP	kg CO <sub>2</sub> -eq	2,47E+02	5,77E+00	5,63E+00	2,48E+00
ODP	kg CFC11 -eq	8,53E-06	1,12E-06	9,19E-07	4,84E-07
POCP	kg C <sub>2</sub> H <sub>4</sub> -eq	5,35E-02	9,45E-04	8,53E-04	4,01E-04
AP	kg SO <sub>2</sub> -eq	1,14E+00	2,00E-02	1,99E-02	8,07E-03
EP	kg PO4 <sup>3-</sup> -eq	2,15E-01	3,46E-03	3,45E-03	1,35E-03
ADPM	kg Sb -eq	1,24E-04	1,25E-05	1,61E-05	5,60E-06
ADPE	MJ	1,25E+03	9,02E+01	7,38E+01	3,89E+01

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer; POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water; EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources

Reading example: 9,0 E-03 = 9,0\*10-3 = 0,009 \*INA Indicator Not Assessed



Resource use					
Parameter	Unit	A1	A2	A3	A4
RPEE	MJ	8,91E+02	1,58E+00	1,23E+02	7,04E-01
RPEM	MJ	4,61E+01	0,00E+00	0,00E+00	0,00E+00
TPE	MJ	9,37E+02	1,58E+00	1,23E+02	7,04E-01
NRPE	MJ	1,57E+03	9,29E+01	8,30E+01	4,01E+01
NRPM	MJ	3,39E+01	0,00E+00	0,00E+00	0,00E+00
TRPE	MJ	1,61E+03	9,29E+01	8,30E+01	4,01E+01
SM	kg	1,34E+02	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	1,72E+02	0,00E+00	2,13E-02	0,00E+00
NRSF	MJ	3,85E+02	0,00E+00	0,00E+00	0,00E+00
w	m <sup>3</sup>	6,92E+02	2,13E-02	1,90E-02	9,46E-03

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPE Non renewable primary energy resources used as energy carrier; NRPM Non renewable primary energy resources used as materials; TRPE Total use of non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

Reading example: 9,0 E-03 = 9,0\*10-3 = 0,009 \*INA Indicator Not Assessed

## End of life - Waste

Parameter	Unit	A1	A2	A3	A4
HW	kg	4,11E-02	4,89E-05	4,17E-05	2,13E-05
NHW	kg	6,00E+01	8,05E+00	1,60E+00	3,64E+00
RW	kg	INA*	INA*	INA*	INA*
HW Hazardous waste disposed: NHW Non hazardous waste disposed:	RW Radioactive waste disposed				

HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste dispose Reading example: 9,0 E-03 = 9,0\*10-3 = 0,009 \*INA Indicator Not Assessed

## End of life - Output flow

Parameter	Unit	A1	A2	A3	A4				
CR	kg	0,00E+00	0,00E+00	3,50E+01	0,00E+00				
MR	kg	2,02E+01	0,00E+00	1,87E-01	0,00E+00				
MER	kg	5,31E+00	0,00E+00	9,44E-03	0,00E+00				
EEE	MJ	INA*	INA*	INA*	INA*				
ETE	MJ	INA*	INA*	INA*	INA*				
CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy									
Reading example: 9,0 E-03 = 9,0*10-3 = 0,009									
*INA Indicator Not Assessed									



## Additional Norwegian requirements

## Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Data source	Amount	Unit
Electricity, Norway (kWh)	ecoinvent 3.4 Alloc Rec	31,04	g CO2-ekv/kWh

## **Dangerous substances**

The product contains no substances given by the REACH Candidate list or the Norwegian priority list.

### Indoor environment

The product meets the requirements for low pollutant (M1) by EN15251:2007 Appendix E. The product has no impact on the indoor environment.

## Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.

EN 15804:2012+A1:2013 Environmental product declaration - Core rules for the product category of construction products.

ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.

ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.

Iversen et al., (2018) eEPD v3.0 - Background information for EPD generator system. LCA.no report number 04.18.

Iversen et al., (2018) EPD generator for Leca - Background information for customer application, LCA.no report number 06.18

NPCR Part A: Construction products and services. Ver. 1.0. April 2017, EPD-Norge.

NPCR 012 Part B for Thermal insulation products. Ver. 2.0 June 2018, EPD-Norge

Vold, M and Edvardsen, T, 2013: Weber EPD Generator Background information, Østfoldforskning AS, Fredrikstad, Norge, Nov 2013

NPCR Part A: Construction products and services. Ver. 1.0. April 2017

epd-norge.no	<b>Program operator and publisher</b>	Phone:	+47 23 08 80 00
	The Norwegian EPD Foundation	e-mail:	post@epd-norge.no
	Post Box 5250 Majorstuen, 0303 Oslo,Norway	web:	www.epd-norge.no
Leca.	<b>Owner of the declaration</b>	Phone:	+47 41 43 71 00
	Leca International	e-mail:	info@leca.no
	Årnesvegen 1 2009 Nordby	web:	www.leca.no
LCA	<b>Author of the Life Cycle Assessment</b>	Phone:	+47 916 50 916
	LCA.no AS	e-mail:	post@lca.no
	Dokka 1C 1671 Kråkerøy	web:	www.lca.no
LCA,	<b>Developer of EPD generator</b>	Phone:	+47 916 50 916
	LCA.no AS	e-mail:	post@lca.no
	Dokka 1C,1671 Kråkerøy	web:	www.lca.no